CERAMIQUE
Land of Great Ceramic & Tiles

CERAMIQUE

Land of Great Ceramic & Tiles

The product is pressed by high tonnage press, and then fired by 1200 degree constant temperature, To ensure that it has a better perfomance in hardness and crack resistance.

Thickness
5.5/8.0mm

Size : 600x1200 / 900x1800 / 1200x1800mm

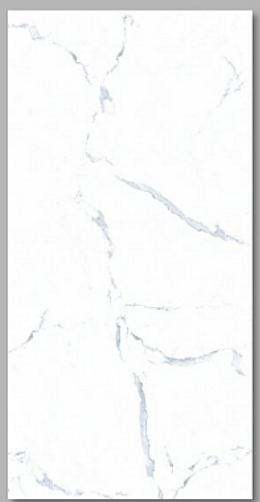

BR89-P52JA611
900x1800mm

BR89-P52JA627
900x1800mm

BR89-P52JA625 (95° polished)
BR89-P52JA625-R5 (55° soft polished)
900x1800mm

BR89-P52JA625

BR89-P52JA601
900x1800mm

BR89-P52JA602
900x1800mm

BR89-P52JA603
900x1800mm

BR89-P52JA605
900x1800mm

BR89-P52JA606
900x1800mm

BR89-P52JA607
900x1800mm

BR89-P52JA609
900x1800mm

BR89-P52JA610
900x1800mm

BR89-P52JA612
900x1800mm

BR89-P52JA613
900x1800mm

BR89-P52JA614
900x1800mm

BR89-P52JA615
900x1800mm

BR89-P52JA618
900x1800mm

BR89-P52JA619
900x1800mm

BR89-P52JA620
900x1800mm

BR89-P52JA621
900x1800mm

BR89-P52JA628
900x1800mm

BR89-P52JA623
900x1800mm

BR89-P52JA624
900x1800mm

BR89-P52JA613

Magnificent and elegant colors, extremely crystal textures and delicate grains give it the reputation of top stone. It uses stone-excel ling standard to create flowing grains, to fill the space with classic and harmonious beauty .

BR89-P52JA619

BR89-P52JA601

Blue color is the particular favorite of royal aristocrats. Delicate and soft grains in noble blue and trendy grey interweave, not only are able to achieve grace and dignity, but also bring us highly imaginative romantic space.

BR89-P52JA607

BR89-P52JA621

With concise dark grey color as basic tone, it forms multi-layer grain changes as well as broad high-end grey color gradation, providing wide application combination and matching to create different space effects.

BR89-P52JA604
900x1800mm

BR89-P52JA608
900x1800mm

BR89-P52JA604

CERAMIQUE
Land of Great Ceramic & Tiles

Size : 600x1200 / 1200x1800 / 900x1800mm

POLISHED

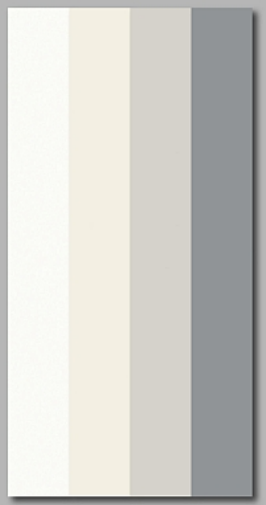

BR89-P51JA501 Pure White
BR89-P51JA502 Beige
BR89-P51JA512 Light Grey
BR89-P51LB701 Dark Grey (full body)

MATT

BR89-H51JA509 Pure White
BR89-H51JA506 Beige
BR89-H51JA507 Light Grey
BR89-H51JA508 Gold
BR89-H51LB702 Chinese Red (full body)
BR89-H51LB703 Blue (full body)
BR89-H51LB708 Black

Extremely classical design, fluent grains, interweaving dark and light colors, all are colliding and harmonizing to give the rustic tiles new life. When concise fashion encounters light simple home decoration, most probably broader and more profound life will be formed.

BR89-H52JA511
900x1800mm

BR89-H52JA503
900x1800mm

BR89-H52JA510
900x1800mm

BR89-H52JA513
900x1800mm

The Granite Series can be cut and processed according to different design needs, and can better meet the needs of designers, with wider use, free matching and better space textures.

BR89-H52JA504
Golden Diamond Grain (dark)

BR89-H52JA505
Golden Diamond Grain (light)

BR89-P52JA616
Haiti Gray Limestone

BR89-P52JA617
Haiti Yellow Limestone

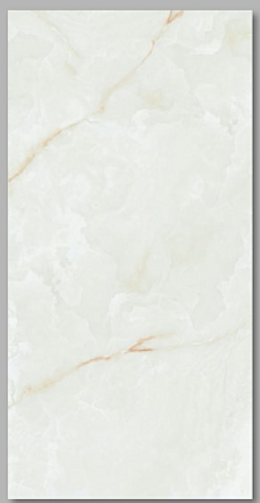

BTPS08001
900x1800mm

BTPS08002
900x1800mm

BTPS08003
900x1800mm

BTPS08004
900x1800mm

BTPS08005
900x1800mm

BTPS08006
900x1800mm

BTPS08007
900x1800mm

BTPS08008
900x1800mm

BTPS08009
900x1800mm

BTPS08010
900x1800mm

BTPS08011
900x1800mm

BTPS08012
900x1800mm

Metro BR89-P51JA501

Tunnel BR89-H51JA506

Sitting Room BR89-P52JA603

Bank BR89-P51JA502

CERAMIQUE
Land of Great Ceramic & Tiles

USAGE METHOD

Average Coverage: 12m²- 15 m² /kg

1. Put the tile or marble back upward and level it, clean the surface & wipe off the re sin, oil & dust etc. Please make sure the back has been cleaned entirely.
2. Paste the adhesive on the back of tile or marble using brush or roller
3. Let it sit for 5 minutes to dry.
4. After the adhesive turns from milk white into transparent, to paste cement on the back of tile & marble (on the level of adhesive) like usual.
5. Recommend to use CHENGU on surface of building as well to get better cohesive ness and adhesiveness, and better water proof effect.

Note: The adhesive has to be used in the right way, or will be less effective.

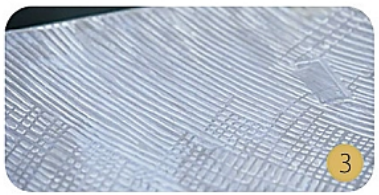

PERFORMANCE FEATURES

Easy & convenient operation — effective, high sticking force.
Easy stir up, no tiles falling off.
Water tolerant, heat resistance, water proof, ice resistance, temperature resistance, an ti hollowing & crack.
Good durability, ageing resistance.
Products can be widely used in external wall tiles, swimming pool, kitchen, engineering ceramics & stone paving.

THE SCOPE OF APPLICATION

The Adhesive is widely used in differernt circumstance due to its outstanding sticking force. Good penetration performance makes it do well in water proof & frozen resistance.

Alternatives : 1Kg , 2 Kg , 5 Kg , 10Kg

How To Cut

Cutting Technology with T-shaped push cutter	Materials: platform, T-shaped push cutter, nails.Steps: Put the porcelain flat on the platform. Fix T-shaped push cutter according to the dimension required. Cut from one end evenly and forcibly. Use a pair of nails to press both ends of the panel, force apart the panel with hands.	
Cutting Technology with Glass Cutter	Materials: platform, ruler, pencil, glass cutter, nails, boardSteps: Put the porcelain flat on the platform. Measure the dimension required with ruler and make marks by pencil. Make board aligns marks and fix the board. Use glass cutter to cut from one end evenly and forcibly. Use a pair of nails to press both ends of the panel, force apart the panel with hands.	
Drilling Technology	To drill a square hole	Choose the right position of drilling and mark. Use auto-water-supply manual cutting machine to cut vertically. Knock carefully and take out the drilled piece.
	To drill a round hole	Choose the right position of drilling and mark. Use an auto-water-supply manual electric drill to cut in slowly from a 45 angle. Cut vertically when the drill is stable.
Chamfer Technology	Materials: a cutting machine with a chamfer device. Put the porcelain flat on the platform. Use a cutting machine with a chamfer device to cut in slowly from the edge of the panel. Spray water to cool down during the cutting.	

How To Install

Application materials	saw-tooth trowel, portable tile-paving vibrator, mechanical stirrer, agitator, rubber float, hammer, leveler, pressure gun, the cross locator, plaster knife, scrubbing brush, tapeline, ink marker.	
Installation Guide	Base Treatment	Making sure the construction base is clean and flat and strength enough. To damp the base and to apply only when water is out from the surface.
	Separating	Setting out for construction by ink marker according to the construction drawings.
	Preparation for the Tile Adhesive	Filling in the water first and then the tile adhesive powder in the proportion of 1:4, and fully stirring the mixture with a low-speed electric stirrer until the cake-free paste appears.
	Construction with the Tile Adhesive	To apply the adhesive by a saw-tooth trowel by using the saw-tooth side to apply the adhesive onto the base at a 45° angle to ensure the perfect paving of tiles and to properly control the adhesive thickness.
	The Tile Adhesive Application to the back of tile	To apply the adhesive by a saw-tooth trowel by using the flat side to apply the adhesive onto the back of tile with forced pressing, and then use the saw-tooth side to scratch the adhesive to coherent jagged stripes
	Porcelain Thin Tile Paving	Suck the porcelain thin tile with a sucker by two persons. Attach it to the wall, and keep the back of the tile in parallel with the triangular stripes of the adhesive, and make sure there is no hollowing and paste leakage .
	Vibrating to be level off	Use a tile-paving vibrator to guarantee the smooth and firm adhesion, and adjust the straightness and flatness with level ruler.
	Leveling Alignment	Put the base of the leveler into the paved thin tile, have the tile next to it. Insert the cross locator into the joint gap, and insert the pressure bar along the base of the leveler. Remove the leveler and cross locator after 24 hours
	Gap-filling	Check and make sure there is no paper and adhesive residue on tile surface and joint gap. Use special tools for gap-filling adhesive construction. Clean immediately after the gap-filling construction, otherwise it might be difficult to remove the gap-filling adhesive after it is cured.
	Clean & Protection	After filling gap for 30 - 60 minutes, to wipe the tiles with a clean, damp sponge to clean the surface of tile.