

ROCK CULTURE  
**LIDO**



**CERAMIQUE**  
Land of Great Ceramic & Tiles

**600x1200MM**  
24"x36"

---

LIDO

LIDO-LM



LIDO-NBM



FEATURES




APPLICATION

SURFACE




8 different faces

COLORS:

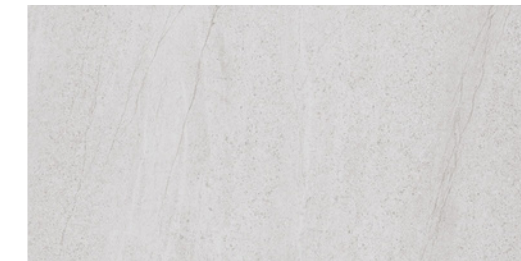

LIDO-LM

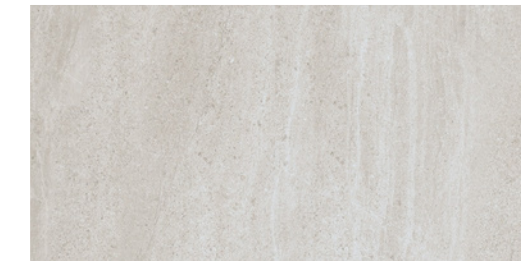

LIDO-NBM

SIZE:

600 X 1200 mm  
24" X 36"

LIDO-LM

LIDO-NBM  
Floor / Wall / 600x1200/24"x48"



LIDO-NBM  
Floor / Wall / 600x1200/24"x48"



**CERAMIQUE**  
Land of Great Ceramic & Tiles

LIDO-LM  
Floor / Wall / 600x1200/24"x48"



LIDO-LM  
Floor / Wall / 600x1200/24"x48"



LIDO-NBM  
Floor / Wall / 600x1200/24"x48"

## TECHNICAL SPECIFICATION

|  | DESCRIPTION                             | STANDARD OF TEST | ISO STANDARD REQUIREMENT   | NANOGRESS STANDARD                           |
|--|---|------------------|--|--|
|  | SIZES                                   | ISO 10545.2      | <b>LENGTH AND WIDTH</b> ± 0.6%<br><b>THICKNESS</b> ± 5%<br><b>EDGE CURVATURE</b> ± 0.5%<br><b>CENTER CURVATURE</b> ± 0.6%<br><b>WARPAGE</b> ± 0.5% | ± 0.2%<br>± 2%<br>± 0.2%<br>± 0.2%<br>± 0.2% |
|  | WATER ABSORPTION                        | ISO 10545.3      | $E \leq 0,5\%$   | 0.03%  |
|  | STRENGTH                                | ISO 10545.4      | <b>MODULS OF RUPTURE</b> $R \geq 35/MM^2$<br><b>BREAKING STRENGTH</b> $S \geq 1300N$   | 55N/M<br>M2<br>>1700N                        |
|  | SURFACE ABRASION                        | ISO 10545.7      | ACCORDING TO MANUFACTURER'S DATA   | MINPEI3                                      |
|  | COEFFICIENT OF LINEAR THERMAL EXPANSION | ISO 10545.8      | TEST METHOD AVAILABLE  | 6.5X10-6C-1                                  |
|  | RESISTANCE OF THERMAL SHOCK             | ISO 10545.9      | TEST METHOD AVAILABLE  | GUARANTEED                                   |
|  | FROST RESISTANCE                        | ISO 10545.12     | REQUIRED   | REQUIRED                                     |
|  | CHEMICAL RESISTANCE                     | ISO 10545.13     | MANUF.TO STATE   | MANUF.TO STATE                               |
|  | STAIN RESISTANCE                        | ISO 10545.14     | CLASS 3 MIN  | CLASS 3 MIN                                  |

## PACKING DETAILS

| SIZE (mm)                  | PCS/BOX | M <sup>2</sup> /BOX | KGS/BOX | BOXES/PALLET | PCS/PALLET | M <sup>2</sup> /PALLET | KGS/PALLET | BOXES/CNT | M <sup>2</sup> /CNT | KGS/CNT |
|----------------------------|---------|---------------------|---------|--------------|------------|------------------------|------------|-----------|---------------------|---------|
|                            |         |                     |         |              |            |                        |            |           |                     |         |
| <b>600X600</b><br>24'X24'  | 4       | 1.44                | 32.50   | 40           | 160        | 57.60                  | 1300       | 820       | 1180.80             | 26880   |
| <b>600X1200</b><br>24'X48' | 2       | 1.44                | 37.50   | 56           | 112        | 80.64                  | 2100       | 640       | 921.60              | 24000   |
| <b>900X1800</b><br>36'X72' | 2       | 3.24                | 62.00   | 30           | 60         | 97.20                  | 1890       | 420       | 1360.80             | 26460   |