



ROCK CULTURE
MODA


CERAMIQUE
Land of Great Ceramic & Tiles

MODA

CERAMIQUE
Land of Great Ceramic & Tiles



MODA
Wall / Floor / 600x1200/24"x48"

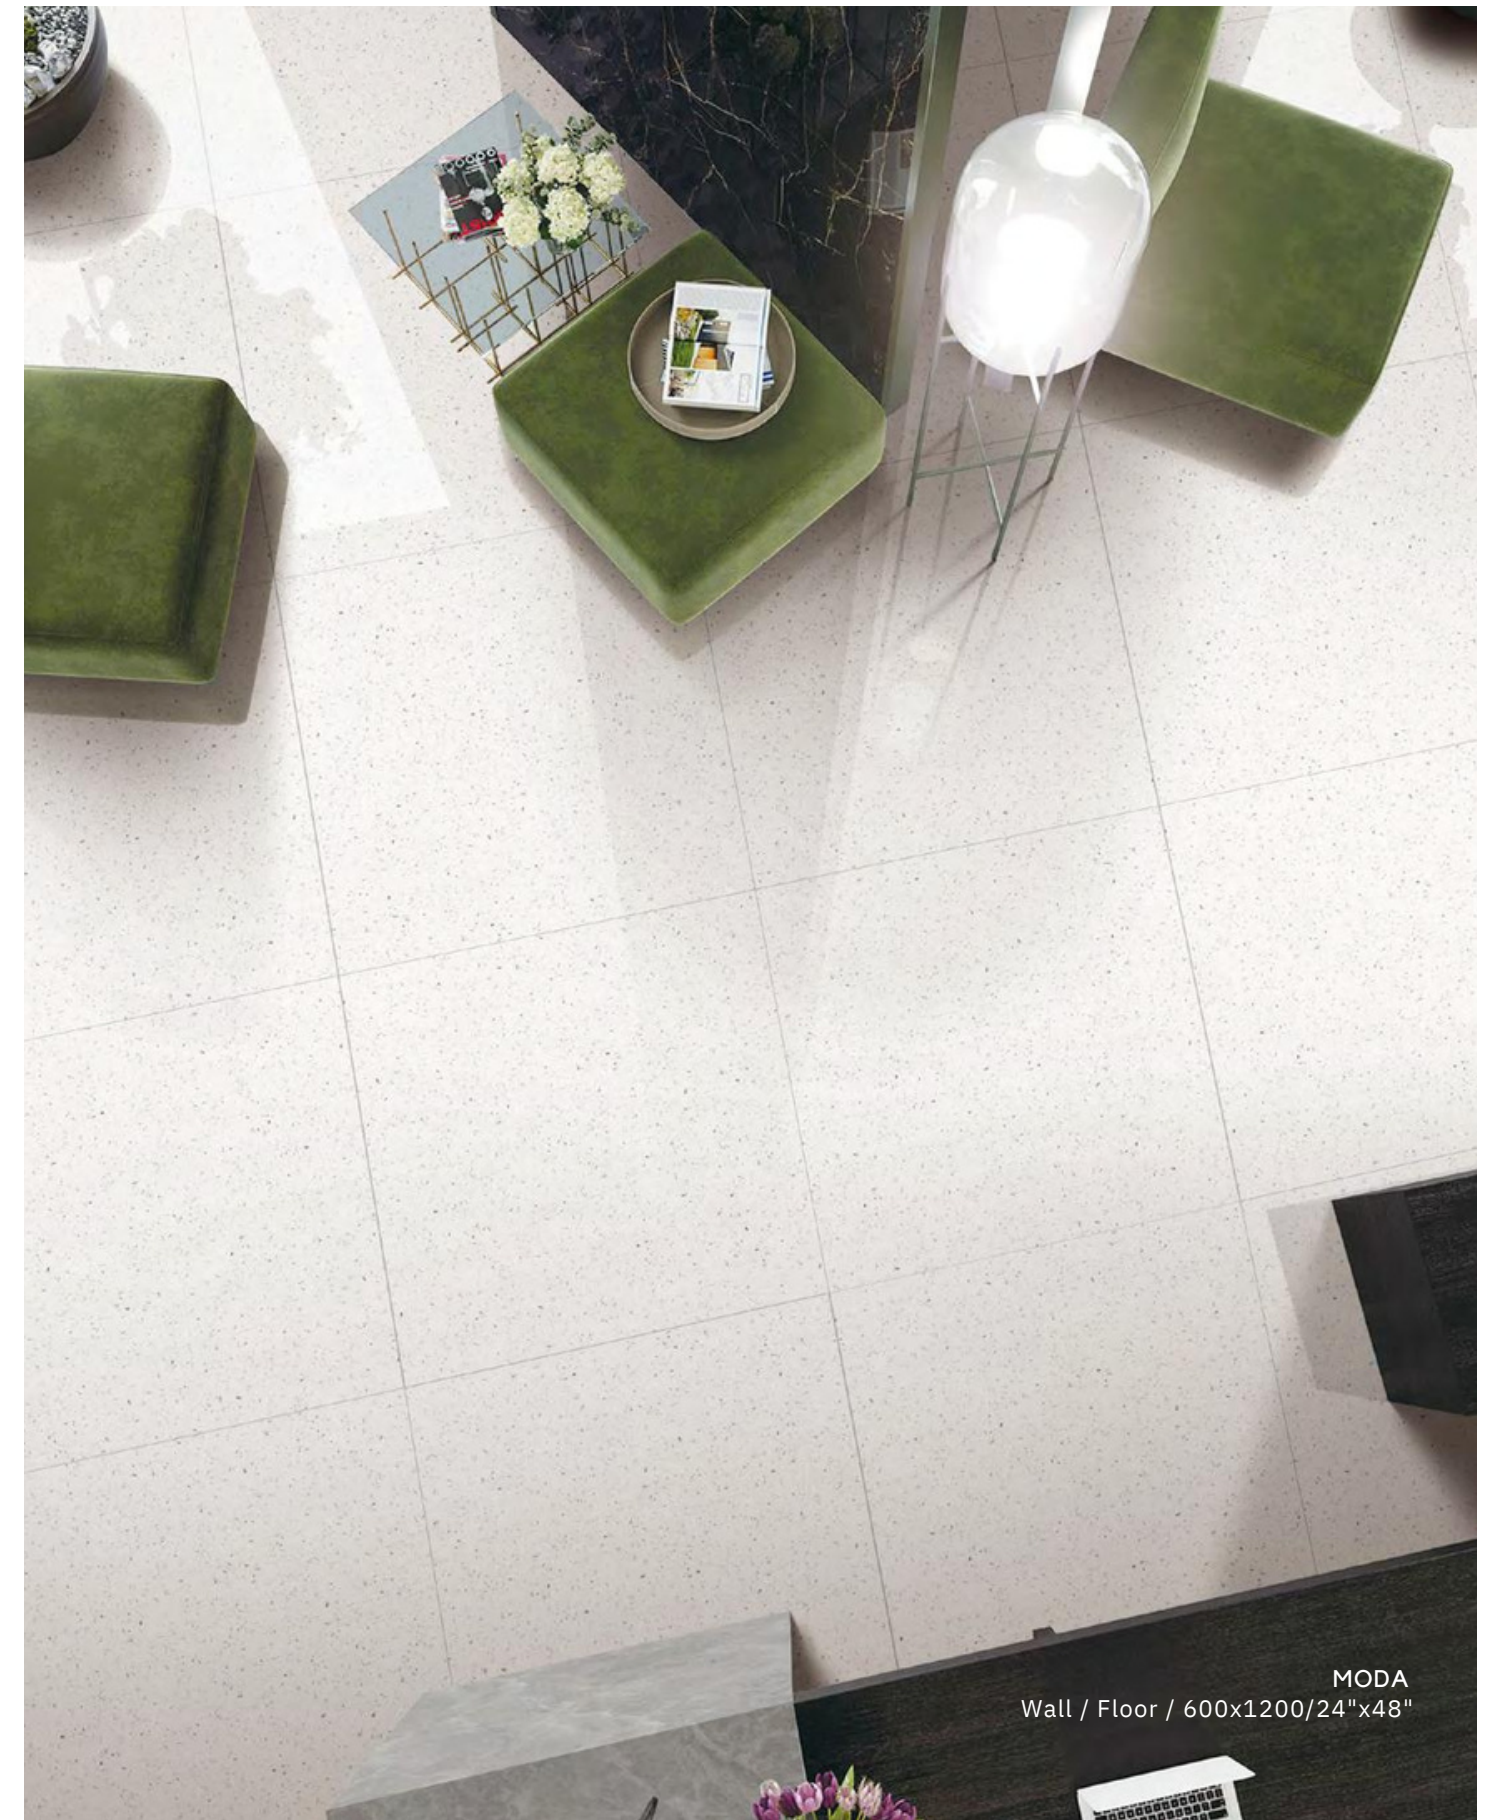




MODA
Wall / Floor / 600x1200/24"x48"

CERAMIQUE
Land of Great Ceramic & Tiles








MODA
Floor / 600x1200/24"x48"

FEATURES

-  HD
High-Definition Effect
-  Easy to Maintain
-  3D Inkjet Technology

APPLICATION


-  Wall Tiles
-  Floor Tiles
-  Residential
-  Commercial
-  Public

SURFACE

-  MS
Monet Grain
Semi Polished

MODA

1 Colors
2 Size
1 Surface

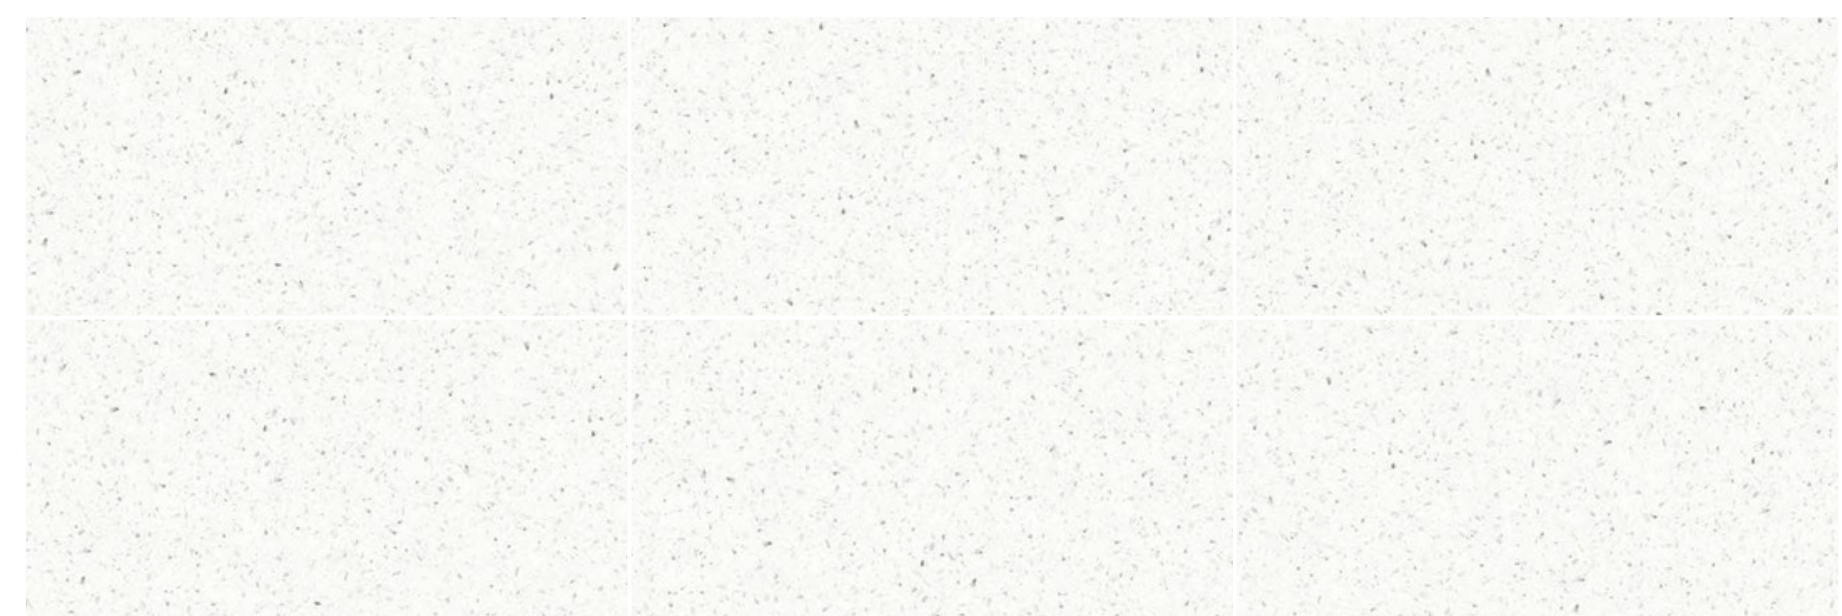

6 different faces

COLORS:



MODA

SIZE:

600 X 1200 mm
24" X 48"

600 X 600 mm
24" X 24"

TECHNICAL SPECIFICATION

	DESCRIPTION	STANDARD OF TEST	ISO STANDARD REQUIREMENT	NANOGRESS STANDARD
	SIZES	ISO 10545.2	LENGTH AND WIDTH ± 0.6% THICKNESS ± 5% EDGE CURVATURE ± 0.5% CENTER CURVATURE ± 0.6% WARPAGE ± 0.5%	± 0.2% ± 2% ± 0.2% ± 0.2% ± 0.2%
	WATER ABSORPTION	ISO 10545.3	$E \leq 0,5\%$	0.03%
	STRENGTH	ISO 10545.4	MODULS OF RUPTURE $R \geq 35/\text{MM}^2$ BREAKING STRENGTH $S \geq 1300\text{N}$	55N/MM 2 >1700N
	SURFACE ABRASION	ISO 10545.7	ACCORDING TO MANUFACTURER'S DATA	MINPEI 3
	COEFFICIENT OF LINEAR THERMAL EXPANSION	ISO 10545.8	TEST METHOD AVAILABLE	$6.5 \times 10^{-6} \text{C}^{-1}$
	RESISTANCE OF THERMAL SHOCK	ISO 10545.9	TEST METHOD AVAILABLE	GUARANTEED
	FROST RESISTANCE	ISO 10545.12	REQUIRED	REQUIRED
	CHEMICAL RESISTANCE	ISO 10545.13	MANUF.TO STATE	MANUF.TOSTATE
	STAIN RESISTANCE	ISO 10545.14	CLASS 3 MIN	CLASS 3 MIN

PACKING DETAILS

SIZE (mm)	PCS/BOX	M ² /BOX	KGS/BOX	BOXES/PALLET	PCS/PALLET	M ² /PALLET	KGS/PALLET	BOXES/CNT	M ² /CNT	KGS/CNT
600X600 24'X24'	4	1.44	32.50	40	160	57.60	1300	820	1180.80	26880
600X1200 24'X48'	2	1.44	37.50	56	112	80.64	2100	640	921.60	24000
900X1800 36'X72'	2	3.24	62.00	30	60	97.20	1890	420	1360.80	26460