



# QUARRAZZO

EXCELLENCE IS IN THE DETAILS

quarrazzo



SNOW





Floor  
QG0 | 60x60cm/24"x24"

Q0



Floor  
Q0 | 60x60cm/24"x24"



# ICE SNOW





Wall  
QG1 | 30x60cm/12"x24"  
Floor  
QG1 | 60x60cm/24"x24"



Q1

2.

1 | 2

1.  
Floor  
QG1 | 60x60cm/24"x24"

2.  
Floor  
Q1 | 60x60cm/24"x24"



NOUGAT







Floor  
QG2 | 60x60cm/24"x24"

Q2



Interior Floor  
Q2 | 60x60cm/24"x24"

Outdoor Floor  
QA2 | 60x60cm/24"x24"

SILVER  
PEARL





1 | 2

1.  
Wall  
QG3 | 60x60cm/24"x24"

2.  
Floor  
Q3 | 60x60cm/24"x24"





Interior Floor  
Q3 | 60x60cm/24"x24"

Outdoor Floor  
QA3 | 60x60cm/24"x24"

# BASALT BLACK





Wall1  
QG1 | 30x60cm/12"x24"  
Wall2  
QG3 | 30x60cm/12"x24"  
Floor  
QG4 | 60x60cm/24"x24"

Q4

Wall  
Q4 | 75x150cm/30"x60"  
Floor  
Q4 | 75x150cm/30"x60"






# NIGHT SKY





1 | 2

- 1.  
Wall  
Q2 | 30x60cm/12"x24"
- Floor  
Q5 | 60x60cm/24"x24"
- 2.  
Floor  
QG5 | 60x60cm/24"x24"

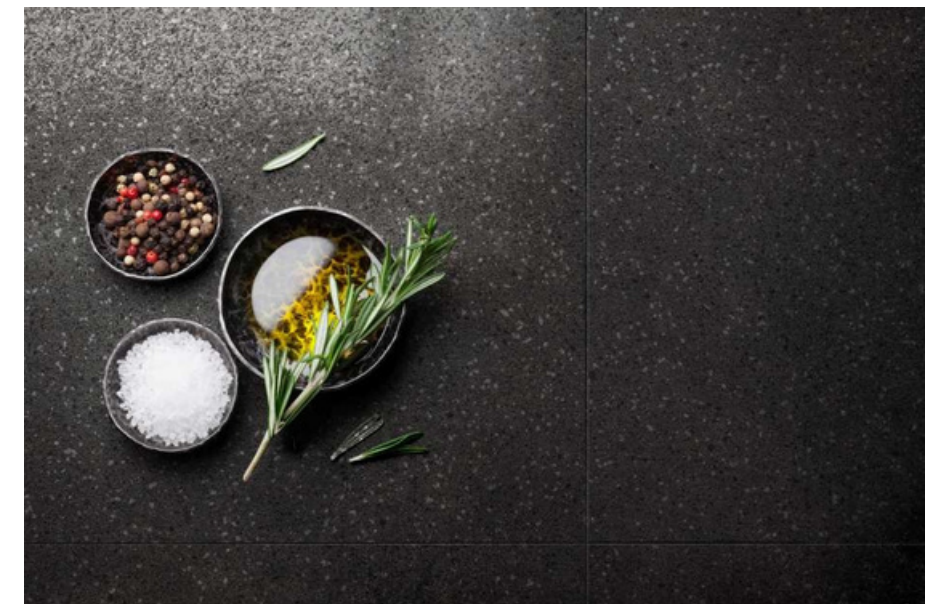

Q5

Interior Floor  
Q5 | 75x150cm/30"x60"

Outdoor Floor  
QA5 | 75x150cm/30"x60"



# Snow Q0


20 Faces



60x60cm / 24"x24"



30x60cm / 12"x24"



### Finishes



Glacial  
Q0

35-40°  
Gloss

Granular  
Lappato




Matt  
Q0

3-5°  
Gloss

R10

# Ice Snow Q1

20 Faces




75x150cm x7.5mm  
30"x60" x0.3"



60x60cm / 24"x24"



30x60cm / 12"x24"



### Finishes



Glacial  
Q1

35-40°  
Gloss

Granular  
Lappato



Matt  
Q1

36°  
Gloss

R10



Anti-Slip  
QA1

36°  
Gloss

R11+

# Nougat Q2

20 Faces




75x150cm x 7.5mm    30"x60" x 0.3"





60x60cm / 24"x24"




30x60cm / 12"x24"



## Finishes

-  Glacia I Q2    35-40° Gloss    Granular Lappato
-  Matt Q2    35° Gloss    R10
-  Anti-Slip QA2    36° Gloss    R11+

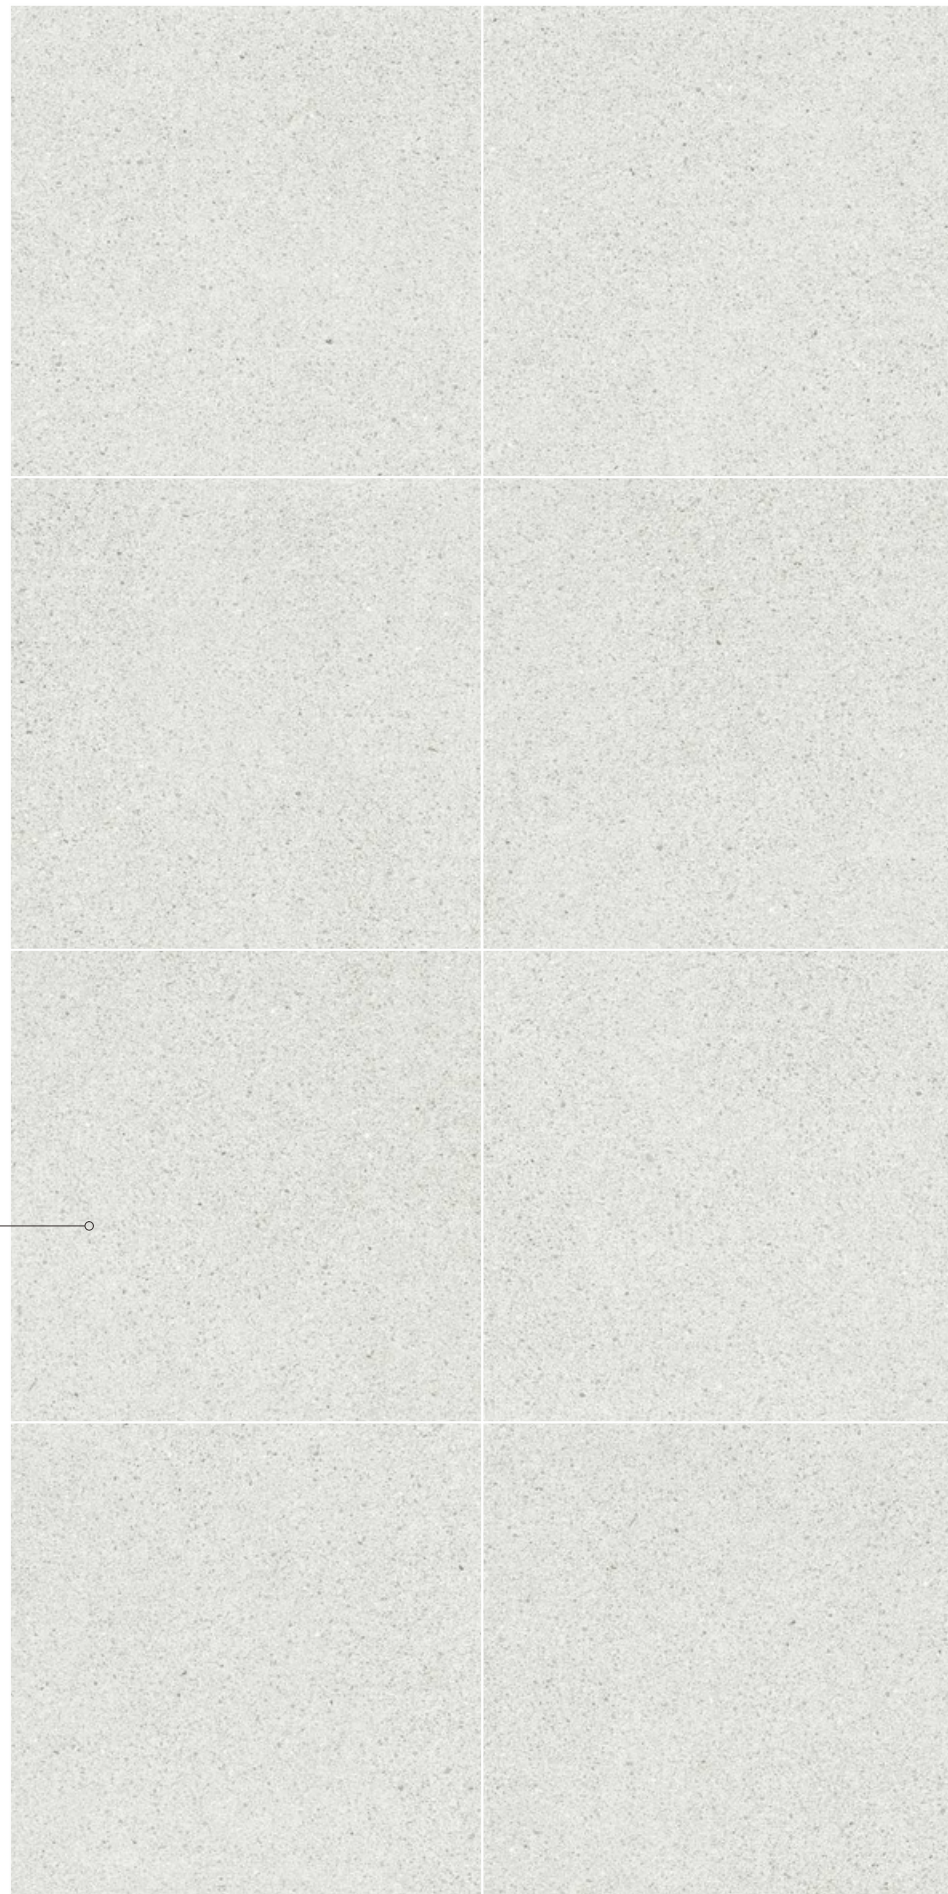

# Silver Pearl Q3

20 Faces




75x150cm x 7.5mm    30"x60" x 0.3"





60x60cm / 24"x24"




30x60cm / 12"x24"



## Finishes

-  Glacia I Q3    35-40° Gloss    Granular Lappato
-  Matt Q3    36° Gloss    R10
-  Anti-Slip QA3    36° Gloss    R11+

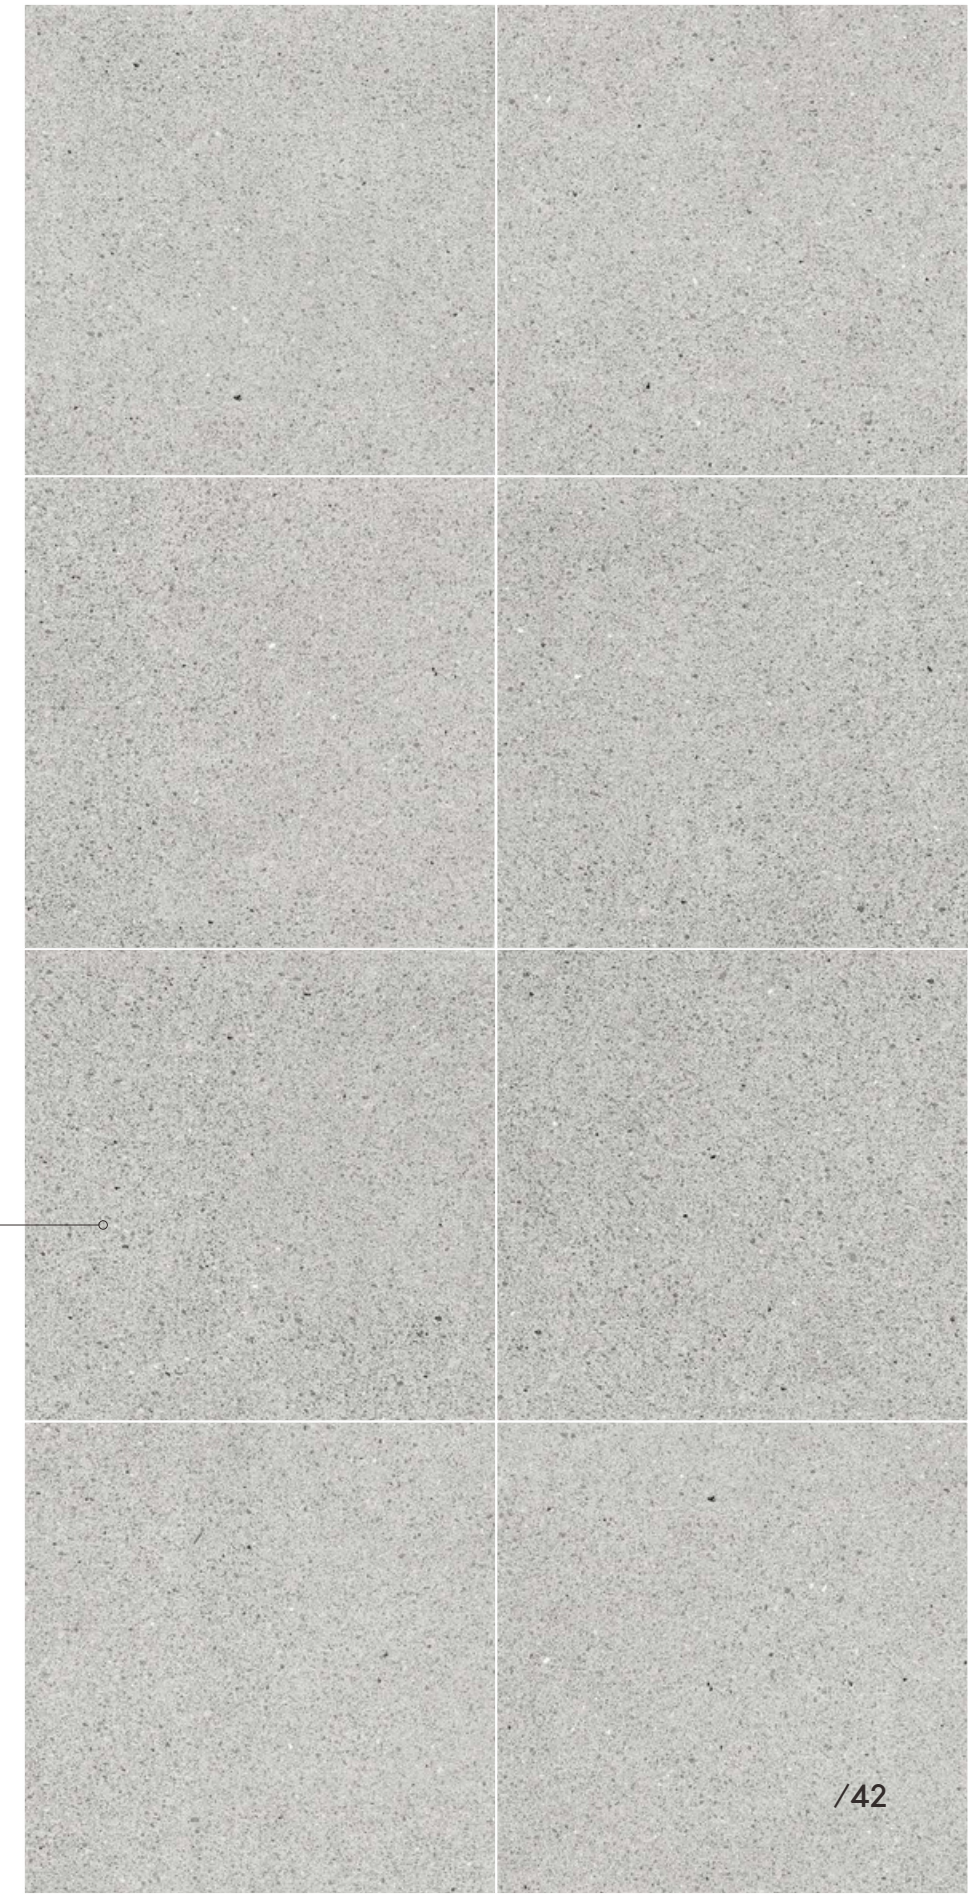

## Basalt Black Q4

20 Faces



75x150cm  
m x 7.5mm


30"x60"  
x 0.3"



60x60cm / 24"x24"



30x60cm / 12"x24"



### Finishes



Glacia  
l Q4

35-  
40  
Gloss

Granula  
r  
Lappato



Matt  
Q4

3-5  
Gloss


R10



Anti-  
Slip  
Q4

3-5  
Gloss

R11+

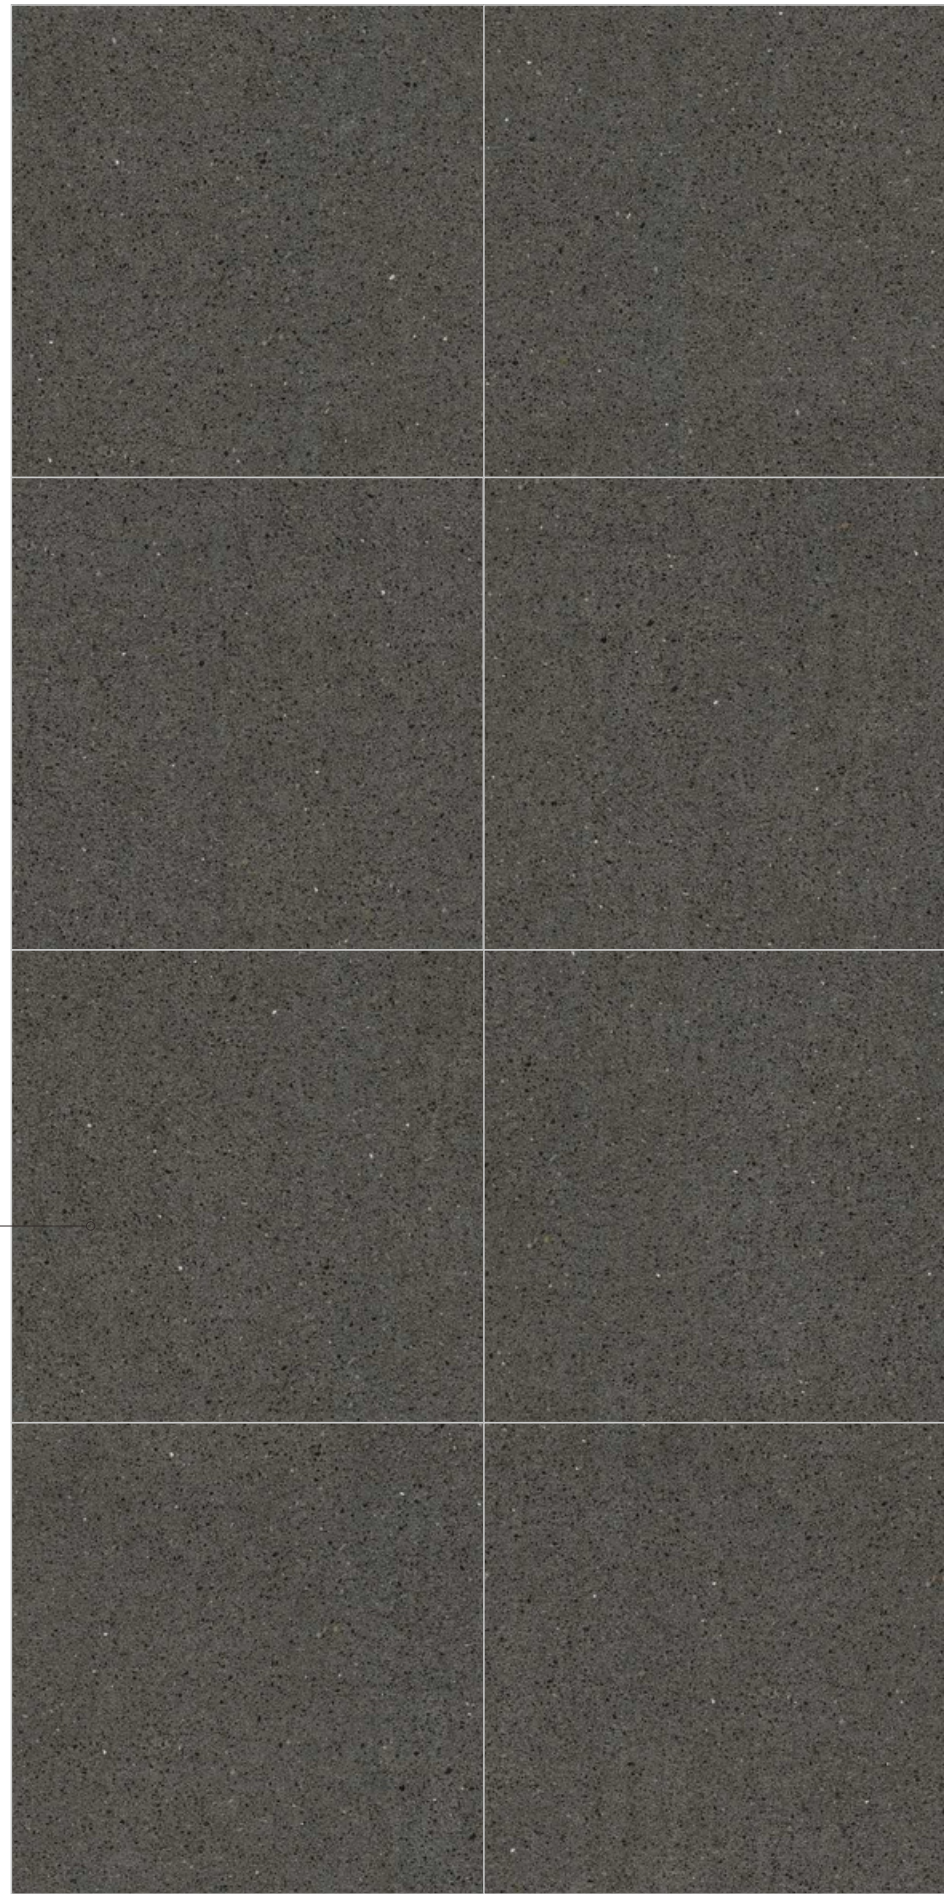

## Night Sky Q5

20 Faces



75x150cm  
m x 7.5mm

30"x60"  
x 0.3"



60x60cm / 24"x24"



30x60cm / 12"x24"



### Finishes



Glacia  
l Q5

35-  
40  
Gloss

Granula  
r  
Lappato



Matt  
Q5

3-5  
Gloss

R10

















Anti-  
Slip  
Q5

3-5  
Gloss

R11+



## Technical Performance

		TEST METHOD	INTERNATIONAL STANDARDS	FLORINA VALUE
	LENGTH	ISO 10545-2	± 0.6%, ± 2.0mm	± 0.1%, ± 1.0mm
	WIDTH	ISO 10545-2	± 0.6%, ± 2.0mm	± 0.1%, ± 1.0mm
	THICKNESS	ISO 10545-2	± 5%, ± 0.5mm	± 1%, ± 0.3mm
	SURFACE FLATNESS	ISO 10545-2	± 0.5%, ± 2.0mm	± 0.5%, ± 2.0mm
	STRAIGHTNESS OF SIDES	ISO 10545-2	± 0.5%, ± 1.5mm	± 0.02%, ± 0.1mm
	RECTANGULARITY	ISO 10545-2	± 0.5%, ± 2.0mm	± 0.1%, ± 1.0mm
	WATER ABSORPTION	ISO 10545-3	Eb≤0.5%	Eb≤0.5%
			Individual maximum 0.6%	Individual maximum 0.6%
	BREAKING STRENGTH	ISO 10545-4	≥ 1300N	≥ 1300N
	MODULUS OF RUPTURE	ISO 10545-4	Minimum 35	Minimum 35
			Individual minimum 32	Individual minimum 32
	STAIN RESISTANCE	ISO 10545-14	Minimum Class 3	Class 5 Livello 5 Classe5
	ABRASION RESISTANCE	ISO 10545-7	Report abrasion class	Class 3-4
			Report cycles passed	1500
	FROST RESISTANCE	ISO 10545-12	Required	Pasa
	CRAZING RESISTANCE	ISO 10545-11	Required	Pasa
	SLIP RESISTANCE	DIN 51130	From R9 to R11 Da R9 a R11	Matt R9 - R10 Anti-Slip R11
		DIN 51097	Class A, B and C	Matt Class B Anti-Slip Class C
		ANSI A137.1-2012	Matt μ≥0.42 Anti-Slip μ≥0.64	Glacial μ≥0.45 Matt μ≥0.55 Anti-Slip μ≥0.68
		AS 4586:2013 Appendix A	P0 - P5	Matt P3 Anti-Slip P5
		GB/T 4100-2015 Appendix M	μ≥0.5	Static friction coef cient of oor tile ≥0.5

## Packing Information

Florina CERAMICS						
FORMAT(cm/in)	PCS/BOX	SMQ/BOX	KG/BOX	BOX/PALLET	SMQ/PALLET	KG/PALLET
75x150x7.5mm 30"x60"x0.3"	2	2.25	36	32	72	1152
60x60/24"x24"	4	1.44	32	40	57.60	1280
30x60/12"x24"	8	1.44	32	40	57.60	1280

## Full Body



▼  
3-5mm  
▲

Before laying, it is recommended to check the color number, size and so on, in order to achieve better results; it is suggested that the special joint mixture of Florina tile be used for all products of Florina tile; There shall be a seam for paving, and it is suggested that Florina's products have a 3-5mm.

Quarrazzo in 20mm thickness available at