

ROCK CULTURE
LIDO



CERAMiQUE
Land of Great Ceramic & Tiles

600x1200MM
24"x36"

LIDO

LIDO-KM



LIDO-NBM





LIDO-KM

FEATURES



APPLICATION

SURFACE



8 different faces

COLORS:

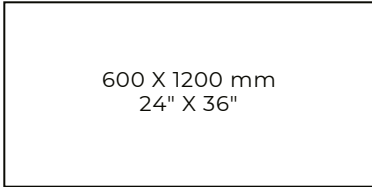


LIDO-KM



LIDO-NBM

SIZE:



LIDO-NBM
Floor / Wall / 600x1200/24"x48"



LIDO-NBM
Floor / Wall / 600x1200/24"x48"



CERAMIQUE
Land of Great Ceramic & Tiles

LIDO-KM
Floor / Wall / 600x1200/24"x48"



LIDO-KM
Floor / Wall / 600x1200/24"x48"








CERAMIQUE
Land of Great Ceramic & Tiles

LIDO-NBM
Floor / Wall / 600x1200/24"x48"

TECHNICAL SPECIFICATION

	DESCRIPTION	STANDARD OF TEST	ISO STANDARD REQUIREMENT		NANOGRESS STANDARD
	SIZES	ISO 10545.2	LENGTH AND WIDTH	± 0.6%	± 0.2%
			THICKNESS	± 5%	± 2%
			EDGE CURVATURE	± 0.5%	± 0.2%
			CENTER CURVATURE	± 0.6%	± 0.2%
			WARPAGE	± 0.5%	± 0.2%
	WATER ABSORPTION	ISO 10545. 3	E≤0,5%		0.03%
	STRENGTH	ISO 10545. 4	MODULS OF RUPTURE	R≥35/MM ²	55N/M
			BREAKING STRENGTH	S≥1300N	M2
	SURFACE ABRASION	ISO 10545. 7	ACCORDING TO MANUFACTURER'S DATA		MINPEI3
	COEFFICIENT OF LINEAR THERMAL EXPANSION	ISO 10545. 8	TEST METHOD AVAILABLE		6.5X10-6C-1
	RESISTANCE OF THERMAL SHOCK	ISO 10545. 9	TEST METHOD AVAILABLE		GUARANTEED
	FROST RESISTANCE	ISO 10545. 12	REQUIRED		REQUIRED
	CHEMICAL RESISTANCE	ISO 10545. 13	MANUF.TO STATE		MANUF.TO STATE
	STAIN RESISTANCE	ISO 10545. 14	CLASS 3 MIN		CLASS 3 MIN

PACKING DETAILS

SIZE (mm)	PCS/BOX	M²/BOX	KGS/BOX	BOXES/PALLET	PCS/PALLET	M²/PALLET	KGS/PALLET	BOXES/CNT	M²/CNT	KGS/CNT
										
600X600 24"X24"	4	1. 44	32. 50	40	160	57. 60	1300	820	1180. 80	26880
600X1200 24"X48"	2	1.44	37.50	56	112	80.64	2100	640	921.60	24000
900X1800 36"X72"	2	3.24	62.00	30	60	97.20	1890	420	1360.80	26460